

Product Data Sheet



KP-900-SPOMA-6

824-960 MHz, 6 dBi, Vertical Polarization OMNI Antenna, 1 Port

- Operates over licensed 800MHz/900MHz and unlicensed 902-928MHz ISM band
- Lightweight, rugged industrial grade design
- Heavy duty powder coated mounting bracket
- Ideally suited for multipoint, Non Line of Sight, and mobile applications

Electrical Specification

Parameter	Unit	824—900	900—960
Frequency Band	MHz	824—900	900—960
Gain	dBi	6.0±0.5	6.0±0.5
Polarization		Vertical	Vertical
Horizontal HPBW	Degree	360	360
Vertical HPBW	Degree	30±5	30±5
Electrical Downtilt	Degree	0	0
VSWR		1.7 typ 2 max	1.5 typ 1.7 max
Return Loss	dB	12 typ 10 max	14 typ 12 max
Max. Input Power per Port	W	100	100
Impedance	Ohms	50	50

Mechanical Specifications

RF Connector Type	Type N Female
RF Connector Quantity	1
RF Connector Position	Bottom of radome
Electrical Grounding	RF connector grounded to reflector and mounting bracket
Radome Material	White Fiberglass
Ingress Protection	IP55 rain and dust resistant
Operating Temperature	-40° to +85° C (-40° to +185° F)
Max. Wind Speed	210km/h 130mph
Compliance	RoHS

Bracket Specifications


Material Type	Power Coated Steel
Mounting Type	Pipe Mount
Mounting pole diameter	30 mm – 51 mm 1.2 in – 2.0 in

OMNI Dimensions

Diameter	453 mm 1.8 in
Length	1015 mm 40.6 in
Net Weight, with brackets	1.1 kg 2.4 lb

Product Data Sheet

Graphical Data

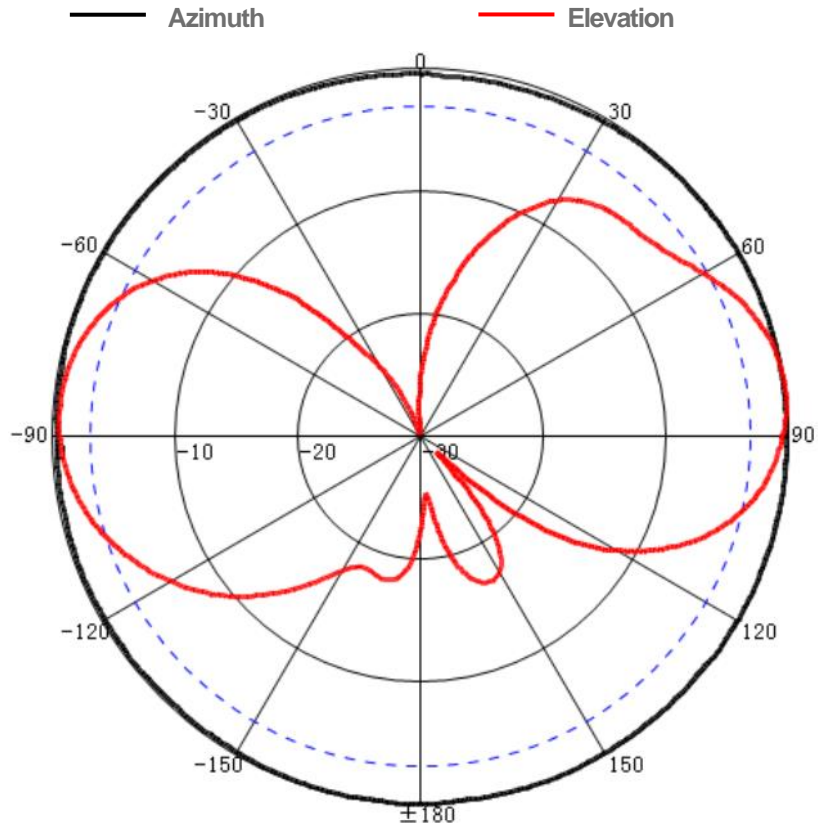

Appendix

HPBW: Average and variation of the antenna's 3dB beamwidth in its horizontal (Azimuth) or vertical (Elevation) pattern.

Electrical Downtilt: Angle in the antenna's elevation pattern in which the maximum gain occurs.

Gain: Antenna's average gain and variation in each frequency band.

© 2024 AlIVE Telecom, Inc. All Rights Reserved. *All specifications are subject to change without notice. See www.kpperformance.com for more details. Revised March 27, 2024.

AlIVE Telecom, Inc., 9850 W 190th St, Suite F, Mokena, IL 60448 Phone: (855) 276-5772 or (780) 702-7577
info@kpperformance.com