

# Product Data Sheet



## KP-900-SPOMA-8

### 824-960 MHz, 8 dBi, Vertical Polarization OMNI Antenna, 1 Port

- Operates over licensed 800MHz/900MHz and unlicensed 902-928MHz ISM band
- Lightweight, rugged industrial grade design
- Heavy duty powder coated mounting bracket
- Ideally suited for multipoint, Non Line of Sight, and mobile applications

### Electrical Specification

Parameter	Unit	824—900	900—960
Frequency Band	MHz	824—900	900—960
Gain	dBi	7.5±0.5	8.0±0.5
Polarization		Vertical	Vertical
Horizontal HPBW	Degree	360	360
Vertical HPBW	Degree	15±5	12±5
Electrical Downtilt	Degree	0	0
VSWR		1.7 typ   2 max	1.5 typ   1.7 max
Return Loss	dB	12 typ   10 max	14 typ   12 max
Max. Input Power per Port	W	100	100
Impedance	Ohms	50	50

### Mechanical Specifications

RF Connector Type	Type N Female
RF Connector Quantity	1
RF Connector Position	Bottom of radome
Electrical Grounding	RF connector grounded to reflector and mounting bracket
Radome Material	White Fiberglass
Ingress Protection	IP55 rain and dust resistant
Operating Temperature	-40° to +60° C (-40° to +140° F)
Max. Wind Speed	210km/h   130mph
Compliance	RoHS



### Bracket Specifications

Material Type	Power Coated Steel
Mounting Type	Pipe Mount
Mounting pole diameter	30 mm – 51 mm   1.2 in – 2.0 in

### OMNI Dimensions

Diameter	38 mm   1.5 in
Length	1613 mm   63.5 in
Net Weight, with brackets	1.7 kg   3.8 lb

## Graphical Data

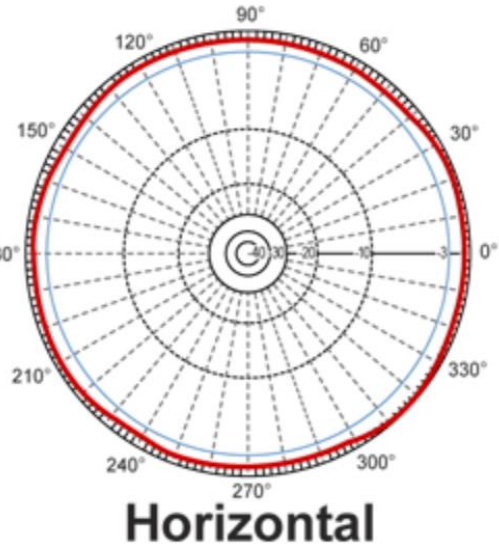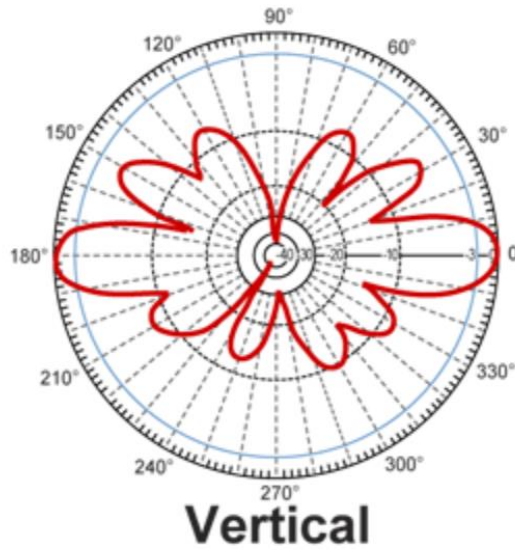

## Appendix

HPBW: Average and variation of the antenna's 3dB beamwidth in its horizontal (Azimuth) or vertical (Elevation) pattern.

Electrical Downtilt: Angle in the antenna's elevation pattern in which the maximum gain occurs.

Gain: Antenna's average gain and variation in each frequency band.