

# 2400-2500, 5150-5850, 6000-7125 MHz Flat Panel MIMO Antenna, 11 dBi Gain, 8 N Type Male Connectors

## **KPANFP1044**

#### Features

- · N Type Male Connector
- 8 x Vertical Polarization
- 8x8 MIMO Functionality

#### **Applications**

- Infotainment systems, Routers, Wi-Fi hotspots, HD video transmission, Gateways, Dash cameras, Public transportation
- Connected cars or self-driving cars, Fleet management, Logistics

### Description

The KPANFP1044 Wi-Fi 6e Antenna from KP Performance is a high performance directional antenna designed for the 2400 MHz to 7125 MHz bands and is available to ship same day. It is a UV protected, outdoor rated antenna with directional pattern. The KPANFP1044 is ideally suited for 802.11 protocols including 802.11ax as well as Zigbee, Bluetooth and is 8x8 MIMO capable.

The KP Performance high performance KPANFP1044 is a rugged antenna providing broad coverage, low latency, increased network capacity and 11 dBi gain. This 8 port N Male directional antenna is suitable for commercial radios and access points in public and private networks that are equipped with N Type connectors.

This Wi-Fi 6e KPANFP1044 antenna with 8 N Male connectors, as well as our wide selection of superior quality RF parts, ships same day. Contact our knowledgeable and friendly technical support and sales staff for your answers on antennas or other KP Performance products.

#### Configuration

•	
Design	Flat Panel
Application Band	Wi-Fi 6E
Band Type	Multi
Radiation Pattern	Directional
Polarization	Vertical
Cable Type	RG58/U
Cable Length	36 in [914.4 mm]
Connector Type	N Male
Number of Ports	8
Lightning Protection	DC Ground

### **Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Frequency Range	2,400		7,125	MHz
Input VSWR			2:1	
Impedance		50		Ohms
Input Power			50	Watts

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 2400-2500, 5150-5850, 6000-7125 MHz Flat Panel MIMO Antenna, 11 dBi Gain, 8 N Type Male Connectors KPANFP1044

- Outdoor Rated Flat Panel Antenna
- 2.4 GHz, 5 GHz, 6 GHz Wi-Fi Bands
- 11 dBi gain
- Public Safety Networks
  - Zigbee, Bluetooth, Wi-Fi

© 2024 Alive Telecom, Inc. All Rights Reserved. \*All specifications are subject to change without notice. See www.kpperformance.com for more details. Revised March 27, 2024.



# 2400-2500, 5150-5850, 6000-7125 MHz Flat Panel MIMO Antenna, 11 dBi Gain, 8 N Type Male Connectors

## **KPANFP1044**



## **Specifications by Band**

Description	Band 1	Band 2	Band 3	Band 4	Band 5	Units
Range	2.4 to 2.5	5.15 to 5.85	6 to 7.125			GHz
Gain	9	11	11			dBi
Horizontal HPBW	120	115	110			Degrees
Vertical HPBW	28	15	12			Degrees
Port Isolation	20	25	25			dB
Front to Back Ratio	25	25	25			dB

## **Mechanical Specifications**

Radome Material <b>Size</b>	UV Resistant ABS
Length Width Height Weight Color	24.25 in [615.95 mm] 19 in [482.6 mm] 2.55 in [64.77 mm] 13.5 lbs [6.12 kg] White
Environmental Specifications Temperature	-10 to +70 deg C

Operating Range Humidity

**Plotted and Other Data** 

Notes:

-40 to +70 deg C

5 to 95

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 2400-2500, 5150-5850, 6000-7125 MHz Flat Panel MIMO Antenna, 11 dBi Gain, 8 N Type Male Connectors KPANFP1044



# 2400-2500, 5150-5850, 6000-7125 MHz Flat Panel MIMO Antenna, 11 dBi Gain, 8 N Type Male Connectors

## KPANFP1044



## Appendix

Electrical Downtilt: Angle in the antenna's elevation pattern in which the maximum gain occurs.

Gain: Antenna's average gain.

**Front to Back Ratio @ 180°±30°**: Average difference between the antenna's maximum gain and the maximum gain in the antenna's back lobe over ±30° angles.

**Cross-polarization Ratio (dB)**: Typical difference between the co-polarization and cross-polarization gain across the sector's 3 dB Beam Width.

Dedicated to serving the needs of the Wireless Internet Service Provider (WISP) market, KP Performance Antennas offers purpose built products that reliably perform in the field. KP Performance Antennas product line consists of Yagi, Grid, Omni, Dish and other style antennas that operate in the 900 MHz, 2.4 GHz, 3 GHz, and 5 GHz frequencies.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 2400-2500, 5150-5850, 6000-7125 MHz Flat Panel MIMO Antenna, 11 dBi Gain, 8 N Type Male Connectors KPANFP1044

URL: https://www.kpperformance.com/2400-2500-5150-5850-6000-7125-mhz-flat-panel-mimo-antenna-11-dbi-gain-8-n-type-male-connectors-kpanfp1044-p.aspx

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. KP Performance reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. KP Performance does not make any representation or warranty regarding the

suitability of the part described herein for any particular purpose, and KP Performance does not assume liability arising out of the use of any part or document.

### **KPANFP1044** CAD Drawing

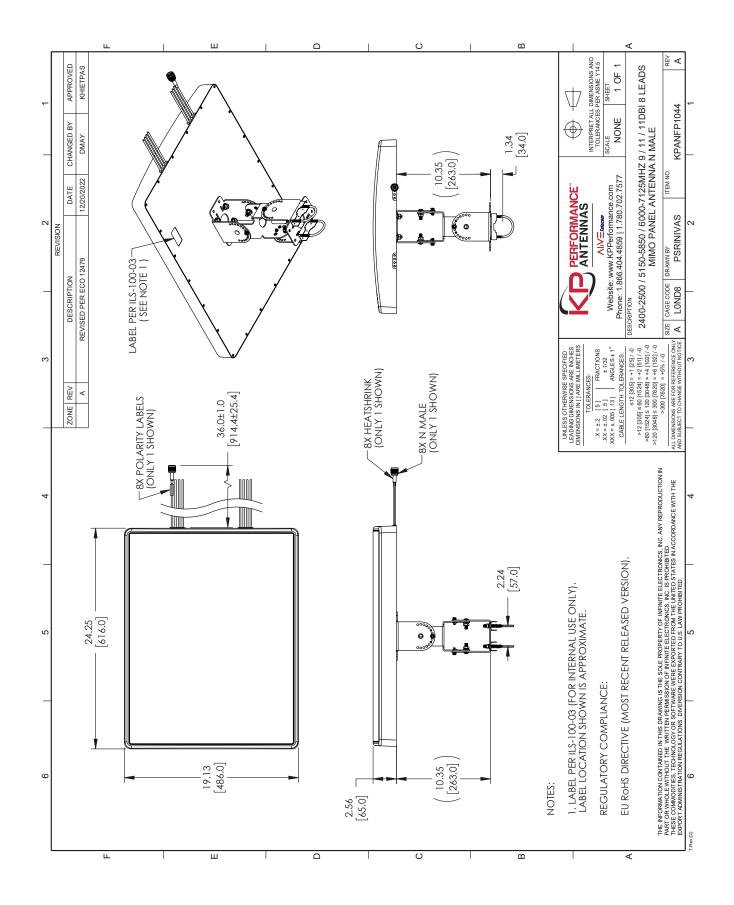

© 2024 Alive Telecom, Inc. All Rights Reserved. \*All specifications are subject to change without notice. See www.kpperformance.com for more details. Revised March 27, 2024.