

2.4 GHz to 2.5 GHz, 13 dBi, H/V Dual Polarization Omni Antenna with Integrated Large Radio Case

KPPA-2GHZ-DPOMA-WC-3



Features

- 2.4 - 2.5 GHz, 13 dBi gain with Horizontal/Vertical Polarization
- 360 degree of coverage with no null zones
- Powder-coated metal case protects your RF connections, minimizing need for tape
- Out performs our competitors by 1 to 3 dBi
- Will not require a RF shield if using a UBNT radio.
- Functional easy-to-install mounting bracket
- 2 x 2 MIMO – Multiple Input and Multiple-Output
- Cost effective all-in-one Omni Antenna solution with radio casing attached
- 2 x N-type Female Right Angle to RP-SMA Female Straight LMR200 cables of 6" length

Applications

- Wireless MIMO LAN systems & IEEE 802.11b/g/n/ax
- Mobile WiMAX Wireless Internet Provider “cell” sites
- Point-to-multipoint (PtMP) requiring 360 degree of coverage
- Cost-sensitive low-density deployments

Description

Includes powder-coated metal case that provides additional environmental protection and RF shielding for popular access point 2x2 MIMO radios in the 2GHz band
UV-resistant radome, anodized aluminium base, and heavy-duty hardware for all-weather operation
IEEE 802.11a/n applications for Hospitality, Industrial, Municipality, MTU/MD, WiMax, WISP, WiFi, Communication

Configuration

Design	Omni
Application Band	2.4Ghz
Band Type	Single
Radiation Pattern	Omni Directional
Polarization	Vertical/Horizontal
Connector Type	N Female
Number of Ports	2
Lightning Protection	DC Ground

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	2,400		2,500	MHz
Input VSWR			1.8:1	
Impedance		50		Ohms
Gain		13		dBi
Electrical Downtilt		1		Degrees
Cross Polarization Ratio	20			dB
Horizontal (Azimuth) HPBW		Omnidirectional		
Vertical (Elevation) HPBW		7		Degrees
Input Power			50	Watts

Electrical Specification Notes:

Click the following link (or enter part number in “SEARCH” on website) to obtain additional part information including price, inventory and certifications:
[2.4 GHz to 2.5 GHz, 13 dBi, H/V Dual Polarization Omni Antenna with Integrated Large Radio Case KPPA-2GHZ-DPOMA-WC-3](#)

2.4 GHz to 2.5 GHz, 13 dBi, H/V Dual Polarization Omni Antenna with Integrated Large Radio Case

KPPA-2GHZ-DPOMA-WC-3



Max input power is 50W per port.

Specifications by Band

Description	Band 1	Band 2	Band 3	Band 4	Band 5	Units
Range	2.4 to 2.5					GHz
Gain	13					dBi
VSWR Max	2:01					
Maximum Input Power	100					Watts

Mechanical Specifications

Radome Material	PVC
Housing Plating/Color	Powder Coat
Size	
Length	58 in [147.32 cm]
Width	4 in [101.6 mm]
Height	6 in [152.4 mm]
Mounting Mast Diameter	1.6 to 2.4 in [40.64 to 60.96 mm]
Weight	16.45 lbs [7.46 kg]
Mechanical Specification Notes:	
Radome material is UV resistant PVC	
Case will fit Large Cambium or Ubiquiti Radio	

Environmental Specifications

Temperature	
Operating Range	-40 to +65 deg C
Wind Survivability	130 MPH [209.21 KPH]
Wind Loading	

Compliance Certifications (see [product page](#) for current document)

IP Rating	IP55
-----------	------

Plotted and Other Data

Notes:


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[2.4 GHz to 2.5 GHz, 13 dBi, H/V Dual Polarization Omni Antenna with Integrated Large Radio Case KPPA-2GHZ-DPOMA-WC-3](#)

2.4 GHz to 2.5 GHz, 13 dBi, H/V Dual Polarization
Omni Antenna with Integrated Large Radio Case

KPPA-2GHZ-DPOMA-WC-3




Typical Radiation Pattern

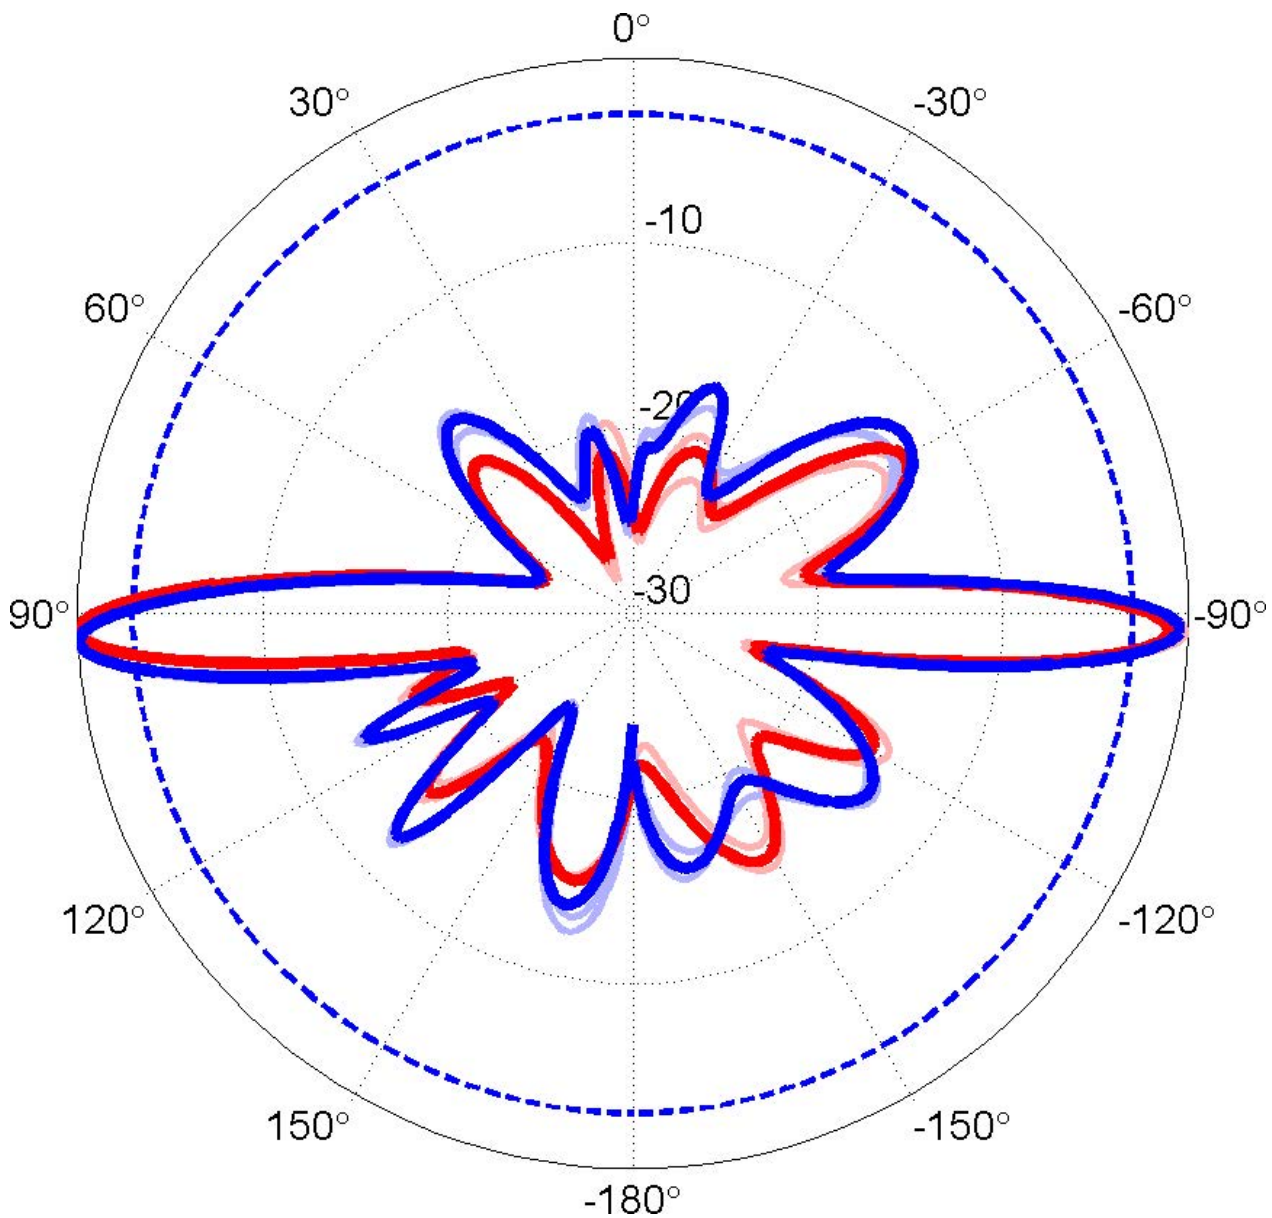

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[2.4 GHz to 2.5 GHz, 13 dBi, H/V Dual Polarization Omni Antenna with Integrated Large Radio Case KPPA-2GHZ-DPOMA-WC-3](#)

2.4 GHz to 2.5 GHz, 13 dBi, H/V Dual Polarization
Omni Antenna with Integrated Large Radio Case

KPPA-2GHZ-DPOMA-WC-3

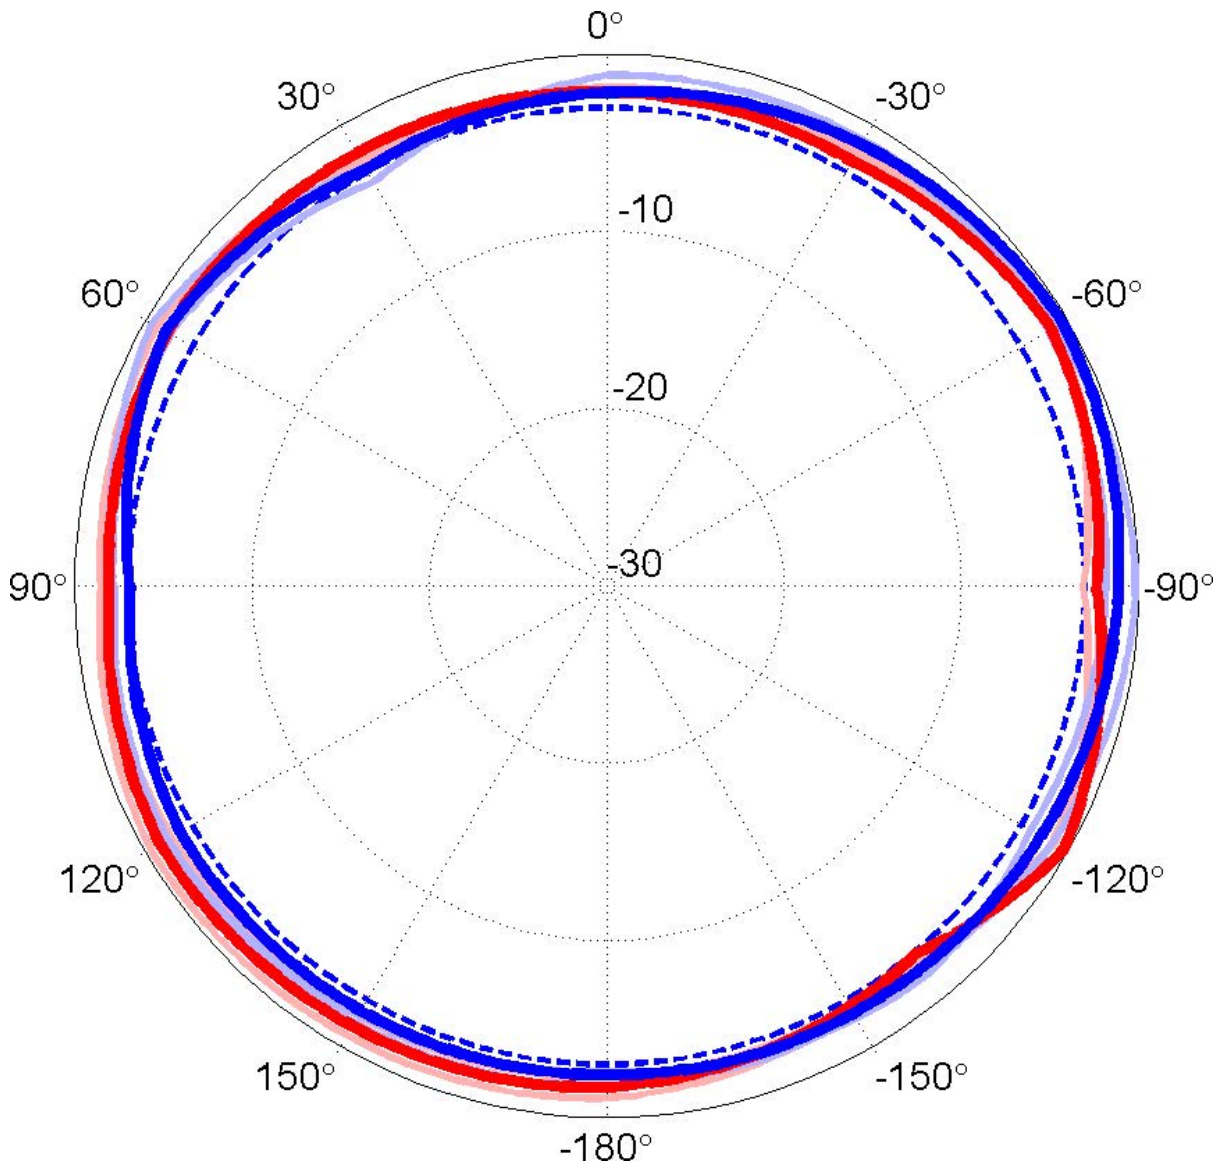

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[2.4 GHz to 2.5 GHz, 13 dBi, H/V Dual Polarization Omni Antenna with Integrated Large Radio Case KPPA-2GHZ-DPOMA-WC-3](#)

2.4 GHz to 2.5 GHz, 13 dBi, H/V Dual Polarization
Omni Antenna with Integrated Large Radio Case

KPPA-2GHZ-DPOMA-WC-3



Appendix

Electrical Downtilt: Angle in the antenna's elevation pattern in which the maximum gain occurs.

Gain: Antenna's average gain.

Front to Back Ratio @ 180°±30°: Average difference between the antenna's maximum gain and the maximum gain in the antenna's back lobe over ±30° angles.

Cross-polarization Ratio (dB): Typical difference between the co-polarization and cross-polarization gain across the sector's 3 dB Beam Width.

Dedicated to serving the needs of the Wireless Internet Service Provider (WISP) market, KP Performance Antennas offers purpose built products that reliably perform in the field. KP Performance Antennas product line consists of Yagi, Grid, Omni, Dish and other style antennas that operate in the 900 MHz, 2.4 GHz, 3 GHz, and 5 GHz frequencies.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.4 GHz to 2.5 GHz, 13 dBi, H/V Dual Polarization Omni Antenna with Integrated Large Radio Case KPPA-2GHZ-DPOMA-WC-3](https://www.kpperformance.com/2ghz-13-dbi-h-v-dual-pol-omni-antenna-large-case-kppa-2ghz-dpoma-wc-3-p.aspx)

URL: <https://www.kpperformance.com/2ghz-13-dbi-h-v-dual-pol-omni-antenna-large-case-kppa-2ghz-dpoma-wc-3-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. KP Performance reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. KP Performance does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and KP Performance does not assume liability arising out of the use of any part or document.

2.4 GHz to 2.5 GHz, 13 dBi, H/V Dual Polarization Omni Antenna with Integrated Large Radio Case

KPPA-2GHZ-DPOMA-WC-3 CAD Drawing

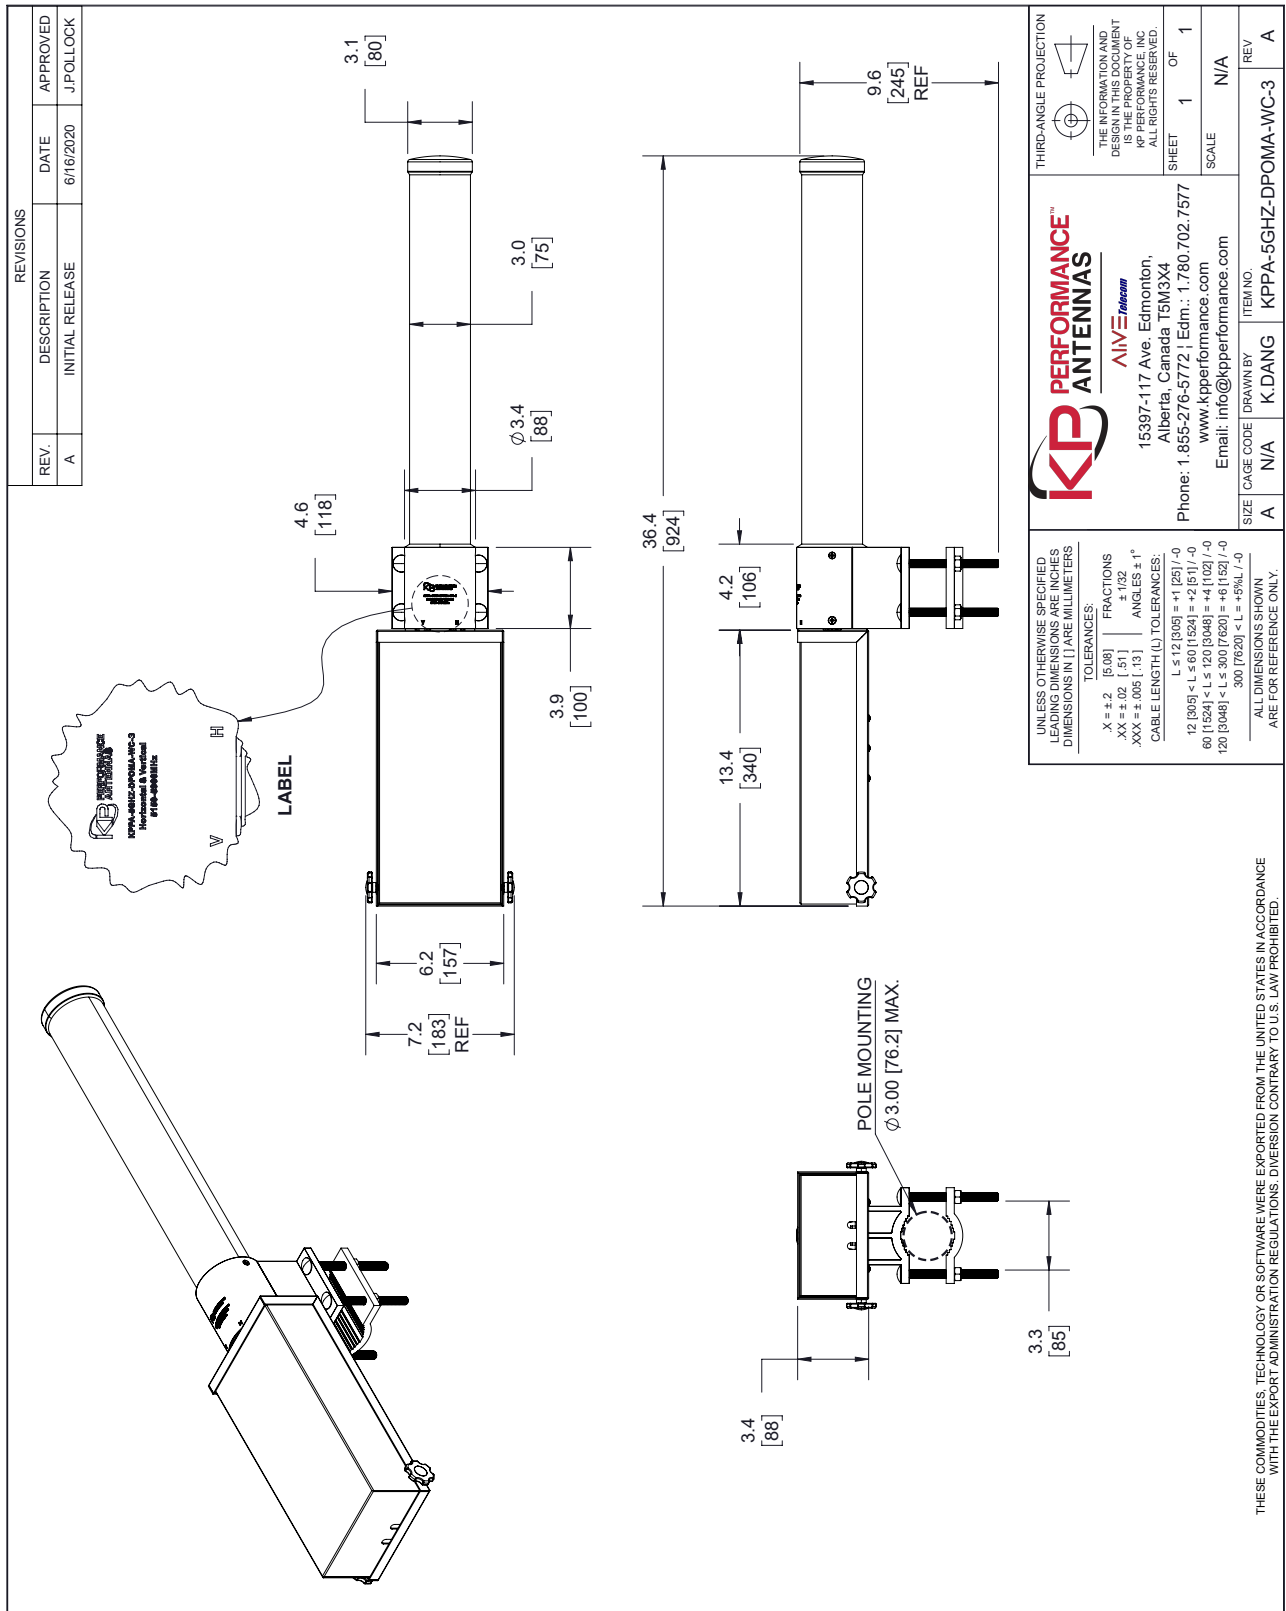

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIMENSION CONTRARY TO U.S. LAW PROHIBITED.

T-Rev/D