

FIELD PROCEDURE FOR POLE MOUNT



IMPORTANT

Please read instructions through completely before beginning installation. Caution should be used. Qualified persons experienced with antenna assembly and installation are required for installation.

DISCLAIMER

KP Performance Inc. disclaims any responsibility or liability for damage or injury resulting from incorrect or unsafe installation practices

Your Pole Mount Kit is shipped to you in one box containing the following components:

1. Antenna assembly
2. Pole Mount Kit


Note: Options and accessories are shipped separately and include separate installation guides. Check the packing slip.

Tools Required:

1. 9/16" Open/box wrench or deep socket wrench
2. Torque Wrench with appropriate sockets

NOTE: The pictures provided in this document are for illustrative purposes only and may not be identical to your antenna system.

Mounting Kit Component identification:

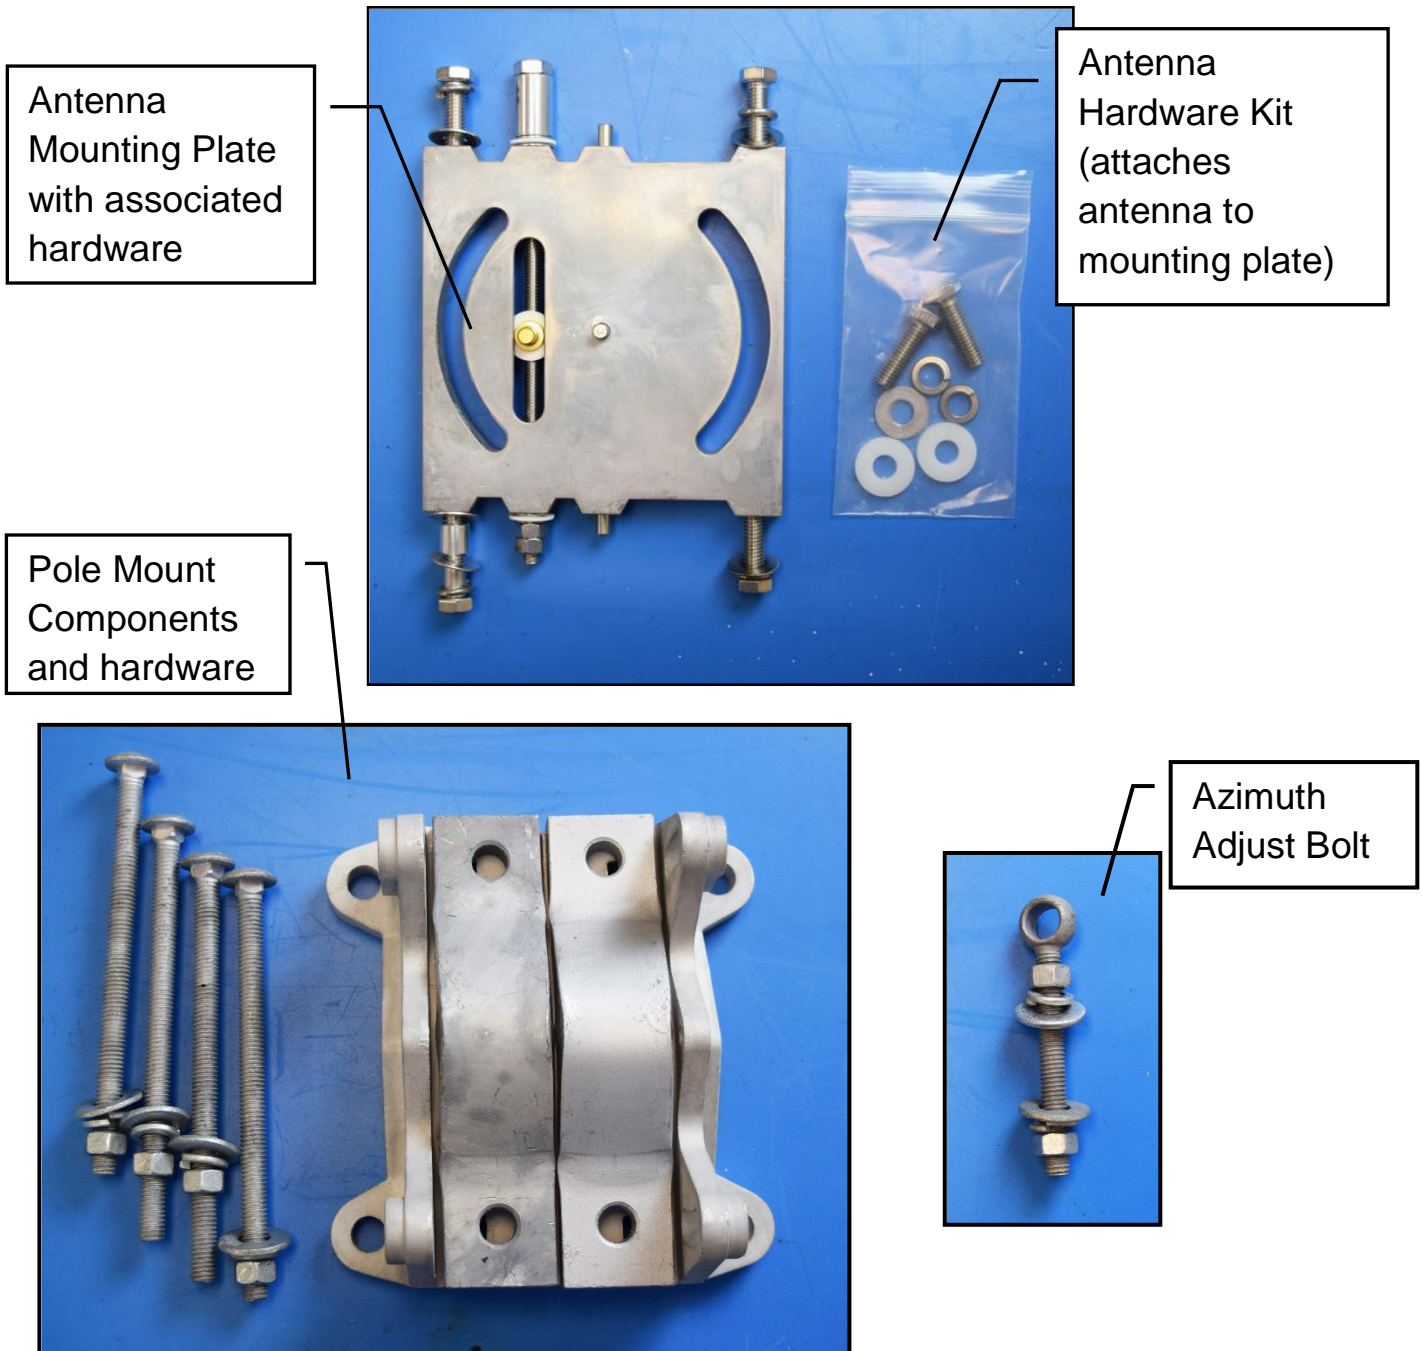

Assembly of the Mount Kit:


1. Assemble the upper and lower pole mounts. Add the Azimuth Adjust Bolt to the lower pole mount.
2. Attach the upper pole mount to top of antenna mounting plate using hardware supplied with plate.



Align pin in plate
with hole on mount

Confirm that the Mount
is centered as shown.
Tighten bolts Securely


Top of mounting plate
indicated by Elevation
Adjustment Nut

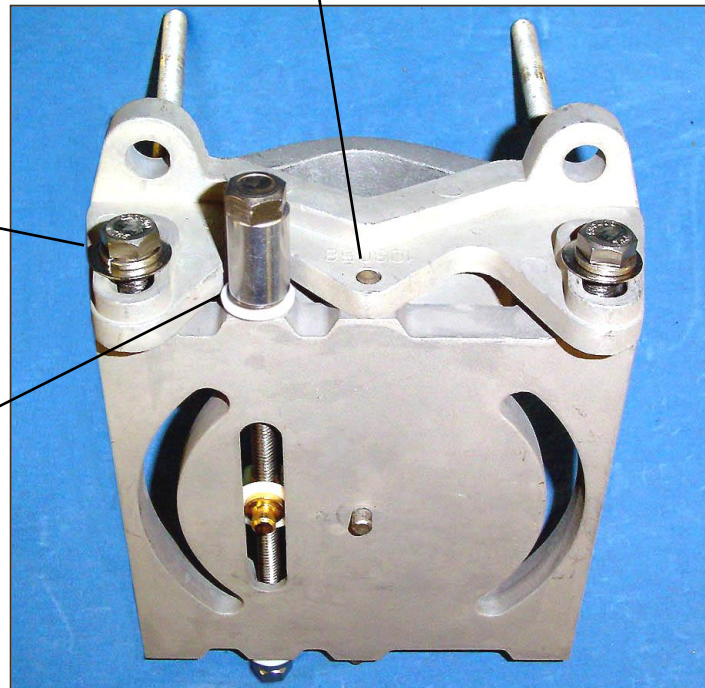


Notes:

- Right hand offset is shown, for Left hand offset rotate mounting plate 180°. (See step 3 for photo).
- Adjustments to the antenna may be necessary for Left hand offset mounting, refer to additional instructions for your antenna model.

3. Attach the lower pole mount to opposite side of plate as shown.

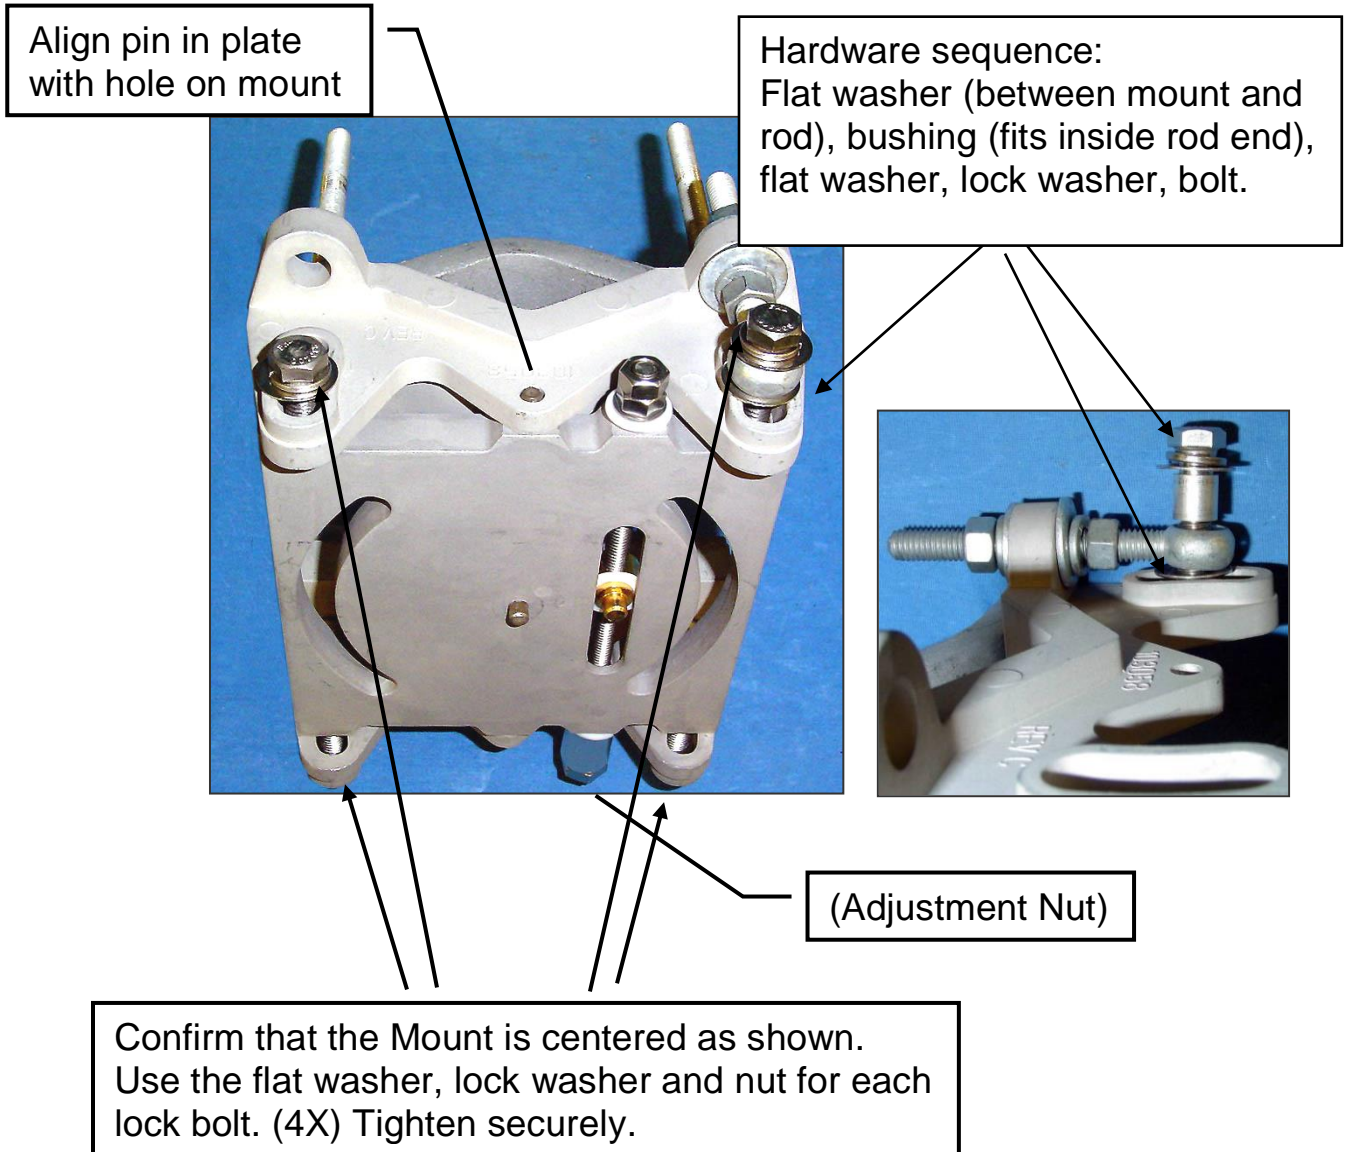


4. Completed assembly views.

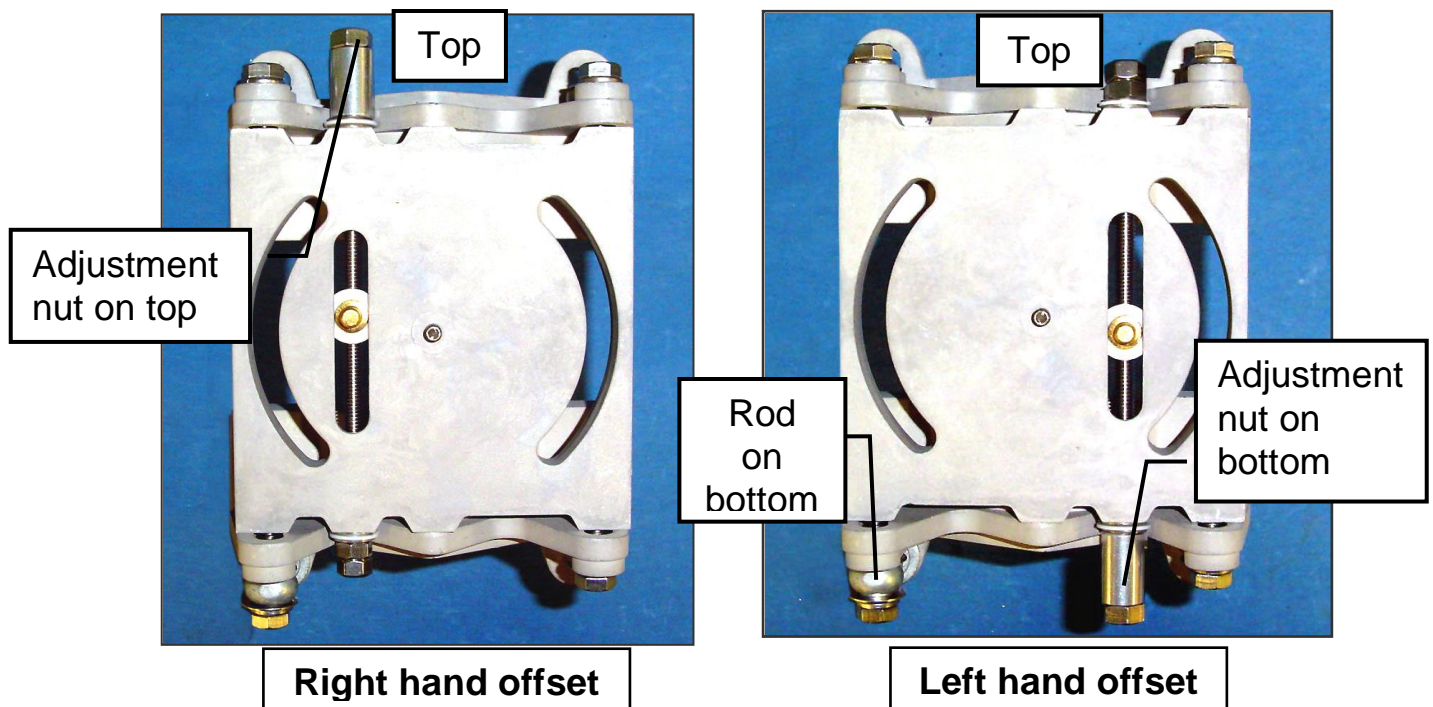


Mounting on Pole

1. Fasten the assembled Mount to a maximum 4.5" OD mounting pipe using pole mounts as shown. Position so that face of mounting plate is parallel to desired beam path.



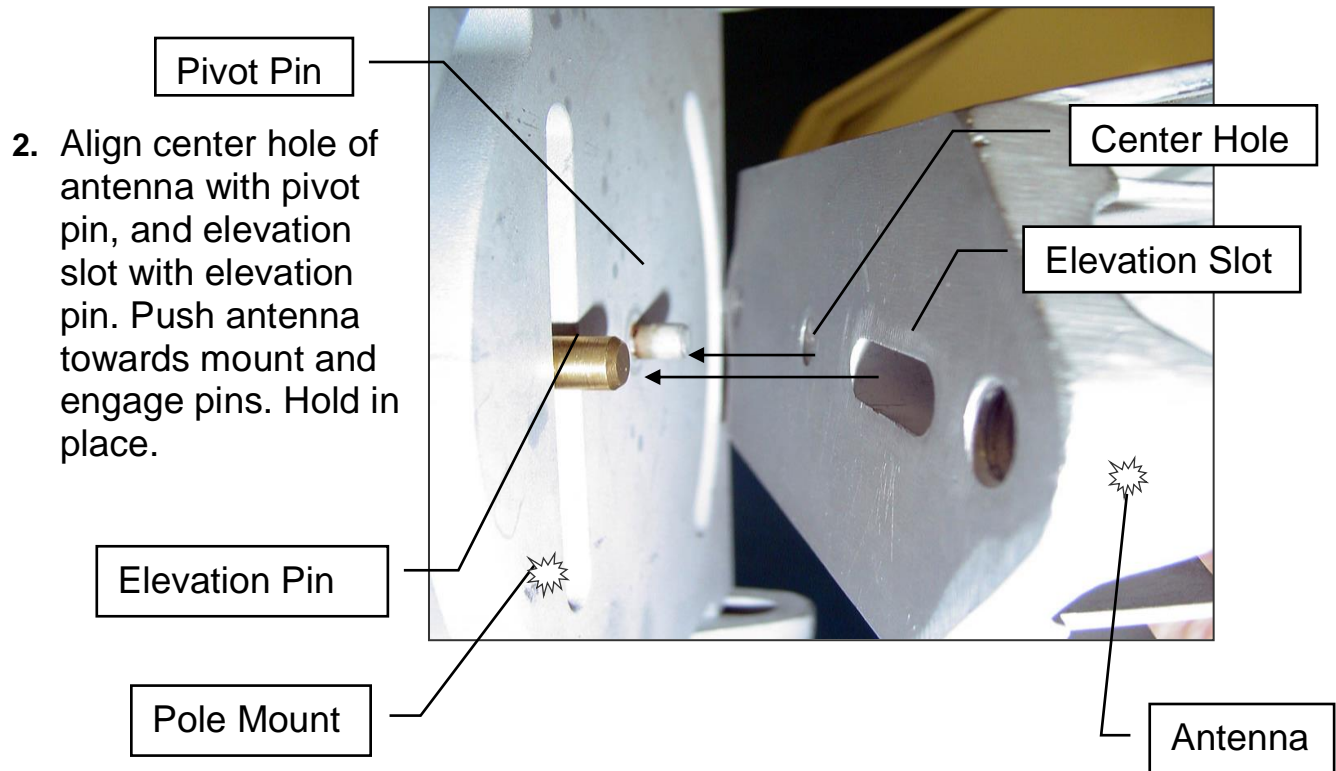


3. While supporting antenna, install (2) 3/8-16 bolts (with washers as shown) through mounting plate and into antenna. Tighten securely. Antenna is now mounted.

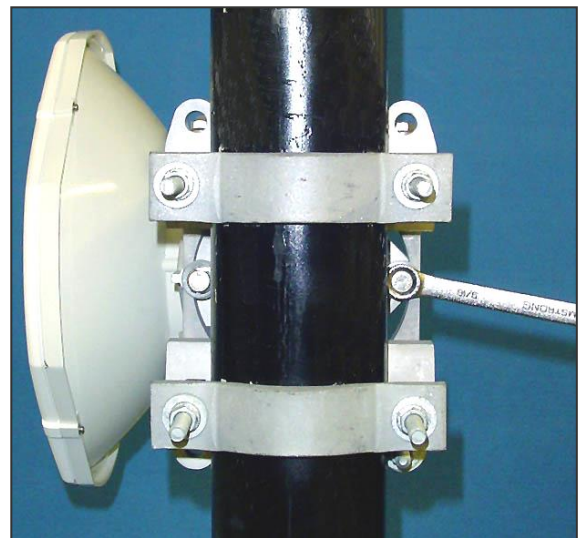

Azimuth Adjustment:

1. Loosen the 4 Azimuth Lock Bolts so mounting plate can move.
Caution: Failure to loosen bolts before adjusting will result in damage to mount
2. Adjust mounting plate using eyebolt adjustment nuts to drive antenna to required location. Monitor RCL (Receive Carrier Level) and adjust per radio manufacturer's instructions. Verify antenna is adjusted on main beam by passing through main beam and out to left and right 1st sidelobe. Return antenna to main beam RCL.
3. Securely tighten the 4 Azimuth Lock Bolts.
4. Securely tighten eyebolt adjustment nuts.
5. Re-check Elevation and adjust if necessary

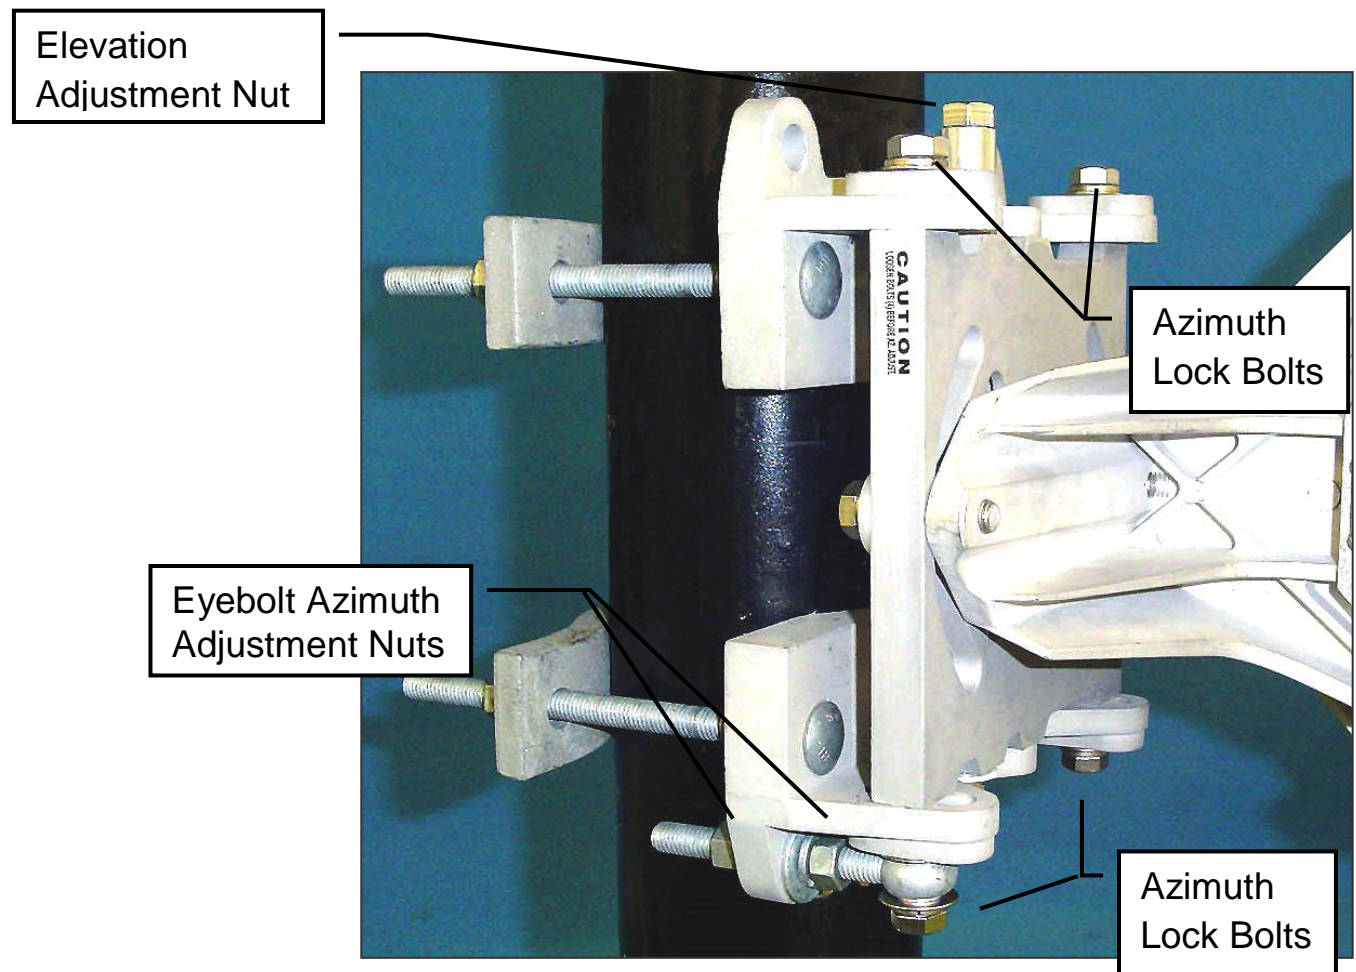


Elevation adjustment:

1. Loosen (2) Antenna Mounting Bolts **slightly** so antenna is able to move. Loosening bolts excessively will cause difficulty during adjustment.

Caution: Failure to loosen bolts before adjusting will result in damage to mount

2. Rotate Elevation Adjustment Nut as required to set elevation. Monitor RCL (Receive Carrier Level) and adjust per radio manufacturer's instructions. Verify antenna is adjusted on main beam by passing through main beam and out to upper and lower 1st side lobe. Return antenna to main beam RCL.

Note: Adjustment is smoother when adjusting beam upward. (Drive antenna down past desired location and adjust while driving antenna up.)

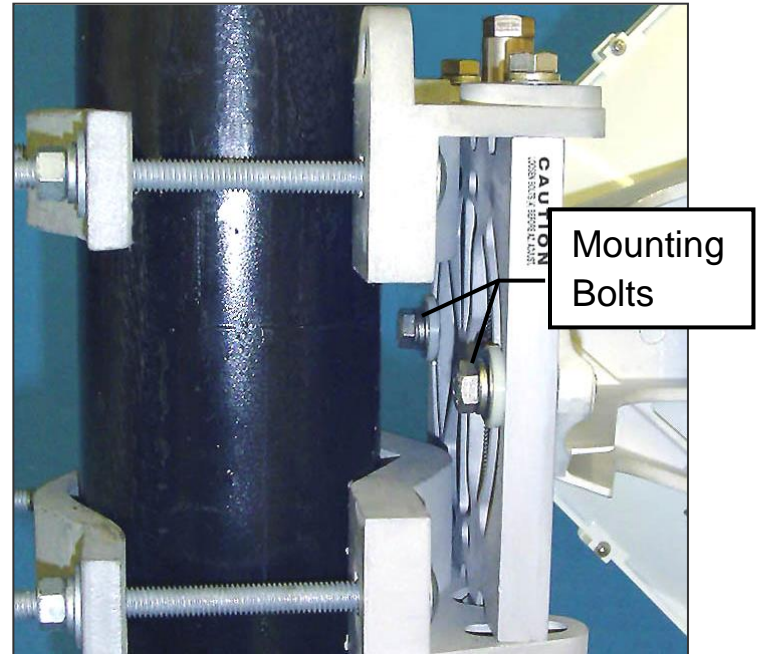

3. Tighten mounting bolts securely after elevation is set.
4. Re-check Azimuth and adjust if necessary.

Final Inspection:

When the antenna orientation is satisfactory, re-check all hardware and torque to **15 Lb-Ft (20.3 N-m)**

After the installation:

Inspection of the antenna should be performed at least once a year to check its condition and to ensure safe operation and maintenance.

SAFETY INFORMATION

This Information May Save You From Death or Injury

Do not attempt to install or dismantle any KP Performance Inc. products until you have read and understood the information and instructions in this document.

Installations: Only trained professional installers should be used to install or dismantle antennas, mounts, and related hardware. It is the responsibility of the installer to be sure that all building and safety codes are met and that the installation is complete and secure.

Lightning Protection: All antennas and related hardware must be attached to and connected correctly to a properly grounded structure. It is the responsibility of the installer to be sure that the installation is completed in accordance with all applicable grounding and safety codes.

Electrocution Hazard: Do not install or dismantle KP Performance Inc. products near any type of power line. Should your antenna or related hardware come in contact with power lines you **could be killed!** Be sure your installation is out of falling distance of any overhead wires-including the lead to any building or structure.
NEVER OPERATE OR LOCATE THIS OR ANY EQUIPMENT NEAR POWER LINES

Electrocution Hazard: Portable or Mobile Installation.

If you are installing a KP Performance Inc. component or part on a portable or mobile platform such as a Portable Tripod, Mast, Truck, or Van, be sure all safety procedures are followed and that operators have been properly trained. No one should be allowed to operate or set up the equipment that has not been properly trained.

KP Performance Inc. is a component supplier and is not the system designer and has no control over how its products are used and installed. It is the responsibility of the System Designer, Van Manufacturer and Owner / Operator to be sure that the overall system is built in accordance with all applicable design and safety standards and procedures and that the operators have been properly trained.
NEVER OPERATE OR LOCATE THIS OR ANY EQUIPMENT NEAR POWER LINES